

ROTADAIRON®

DYNARAKE

FOR SKID-STEER

RAKING

SOIL
PREPARATION

SEEDING

OVERSEEDING

DETHATCHING -
SPIKING

MULCHING



MADE IN FRANCE

FOR SKID-STEER

Functions of the levelling rake DynaRAKE

After TurfRenov[®], ROTADAIRON introduces a new tool to optimize turf restoration operations in «ZERO PHYTO» mode.

Use the DynaRAKE to rake the surface of turf and its collar to a reduced thickness.

Use the DynaRAKE to clear away debris and shape your soil before the ROTADAIRON soil preparation machine passes over it.

Extend your applications to resurfacing paved roads!


Quality of service

A large stock of spare parts is permanently maintained at our factory. Our partners have online tools and quick access to manufacturer information.

Maintain the quality and performance of your Rotadairon[®] by using only original parts.

- 1 Hitch plate
- 2 Rotor with picks
- 3 Strengthened bearing
- 4 Rotadairon[®] transmission

Machine	DynaRAKE 50	DynaRAKE 50 B
Hitch plate	Toro / Ditch Witch / Vermeer	Bobcat
Working width	1250 mm (49" 2/5)	
Total width	1495 mm (58" 4/5)	
Weight	230 Kg (507 lb)	
Carrier : Hydraulic flow	40 to 65 l/min (10.5 to 15.8 US gpm)	
Carrier : Pressure	210 Bars (2900 psi)	
Carrier : Maximum track width	1.25 mètres (49" 2/5)	
Rotor outer diameter	230 mm (9" 1/16)	
Number of picks	74	
Transmission	Hydraulic motor + oil bath chain	
Security	Made by the carrier	
Transport dimension w x L x H	1495 mm x 1120 mm x 670 mm (58" 4/5 x 44" 1/10 x 26" 1/2)	

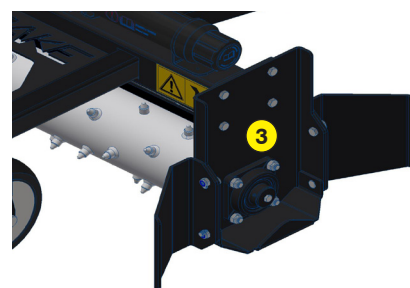

ROTADAIRON
Départementale 92 - Les Hunaudières
72230 Mulsanne - France
Mail : contact@rotadairon.fr
Phone number : (33) 2 43 422 422



www.rotadairon.fr