

# ROTADAIRON®

# SD 700

## SELF-PROPELLED SEEDING MACHINE

WEEDING

RAKING

SOIL  
PREPARATION

SEEDING

OVERSEEDING

DETHATCHING-  
SPIKING

MULCHING



MADE IN FRANCE

# SELF-PROPELLED SEEDING MACHINE

## SD 700

### Functions of the seeder SD 700

The Rotadairon® SD 700 Smart is a self-propelled seeding machine designed for precision seeding, seed burial and field filling.

The Rotadairon® SD 700 can be used to sow the majority of grass varieties such as bluegrass, red fescue, ray grass, etc...

Reliable, handy and efficient, it allows you to sow quickly and effortlessly.

The metal mesh roller, at the front, wafts the soil. Then the seed drill deposits the seeds. Then the rotor claws the soil. Finally the smooth roller at the back compacts the soil ideally to obtain a good germination and avoid the marking of the steps of the user. The Rotadairon® SD 700 is driven by the rear packer roller.

The machine is available in a petrol or electric version (SD 700 E).

### Quality of service





A large stock of spare parts is permanently maintained at our factory. Our partners have online tools and quick access to manufacturer information.

Maintain the quality and performance of your Rotadairon® by using only original parts.

- 1 Oil bath filter
- 2 Parking brake lever
- 3 Gearshift
- 4 Hour meter, tachometer
- 5 Seed level indicator
- 6 Seed flow adjustment
- 7 Calibration device
- 8 EGO battery pack (SD 700 E)
- 9 Seed burying rotor
- 10 Possibility of ballasting the rear roller

Machine	SD 700	SD 700 E
Seeding width	700 mm (27" 1/2)	
Total width	840 mm (33" 3/32)	
Front roller type	Metal mesh	
Front roller diameter	330 mm (13")	
Rear roller type	Smooth	
Rear roller diameter	330 mm (13")	
Weight	162 Kg (357 lb)	
Transport dimension w x L x H	840 mm x 1200 mm x 1310 mm (33" 3/32 x 47" 1/4 x 51" 5/8)	
<b>Motorization</b>		
Engine type	Honda thermal gas engine 4.5 HP	Electrical engine EGO 2700 W
Engine air cleaner	Oil bath air cleaner	/
Transmission	4 forward speeds, 1 reverse	
<b>Seeder</b>		
Type of seed drill	Stainless steel gravity seed drill	
Seed rate adjustment	Adjustment dial 0 to 6	
Seed rate calibration	Calibration bucket	
Seed drill capacity	55 liters (14,5 US gal)	

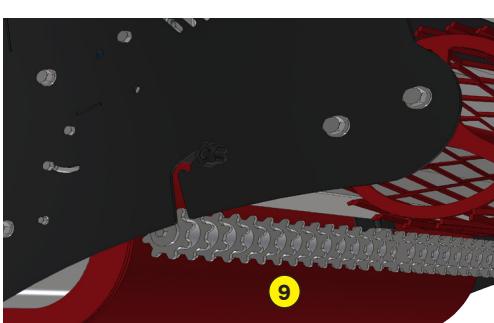

ROTADAIRON  
Départementale 92 - Les Hunaudières  
72230 Mulsanne - France  
Mail : [contacts@rotadairon.fr](mailto:contacts@rotadairon.fr)  
Phone number : (33) 2 43 422 422



[www.rotadairon.fr](http://www.rotadairon.fr)