

# ROTADAIRON®

# RG 140

## KNIFE OVERSEEDING MACHINE

SOIL PREPARATION

SEEDING

OVERSEEDING

DETHATCHING  
SPIKING

MULCHING



MADE IN FRANCE

# KNIFE OVERSEEDING MACHINE

## RG 140

### Functions of the overseeder RG 140



This overseeding machine allows you to perform your over-seeding operations in an economical way. The rotating knives create a groove in which the pods deposit the seeds. The machine allows a high precision seeding which is obtained by volumetric adjustment of all the cells constituting the rotor of the seed drill. The furrows are closed, naturally, by the elasticity of the grass but also by the passage of the roller with special tires. The cleaning of the tank is simplified thanks to the tool-free extraction of the agitator.

### Quality of service

A large stock of spare parts is permanently maintained at our factory. Our partners have online tools and quick access to manufacturer information. Maintain the quality and performance of your Rotadairon® by using only original parts.

- 1 Floating 3rd point hitch for better ground following
- 2 Clean cut by the knives
- 3 Precise dosing of seed quantities with the spline seed drill
- 4 Stainless steel seed drill with spline dispenser
- 5 Special tire roller

Machine	RG 140
Working width	1400 mm (55" 1/8)
Total width	1790 mm (70" 1/2)
Weight	485 Kg (1069.2 lb)
Tractor : Required power	18 - 25 CV
Working depth (max)	0 to 60 mm (0" to 2" 1/4)
Interval between sowing	48 mm (1" 7/8)
Rotor outer diameter	400 mm (15" 3/4)
Number of knives	90
Depth adjustment	Screw jack system
3 point hitch	Categories 1 & 2
PTO speed	540 tr/min
Tractor forward speed	0,8 to 1,5 Km/h (0.5 to 0.9 mph)
Transmission	Angle gearbox + Oil bath chain
Transport dimension w x L x H	1790 mm x 1430 mm x 930 mm (70" 1/2 x 56" 1/4 x 36" 1/2)
Seeder	
Type of seed drill	Stainless steel seed drill by spline distributor
Seed rate adjustment	Adjustment clock 0 to 12 o'clock
Seed drill capacity	130 liters (34 US gal)

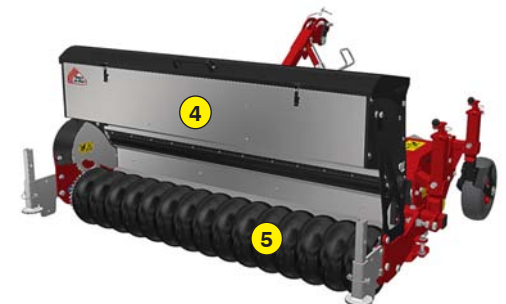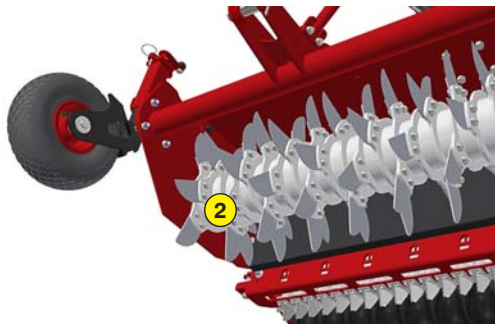

5



ROTADAIRON  
Départementale 92 - Les Hunaudières  
72230 Mulsanne - France  
Mail : [contacts@rotadairon.fr](mailto:contacts@rotadairon.fr)  
Phone number : (33) 2 43 422 422



[www.rotadairon.fr](http://www.rotadairon.fr)